
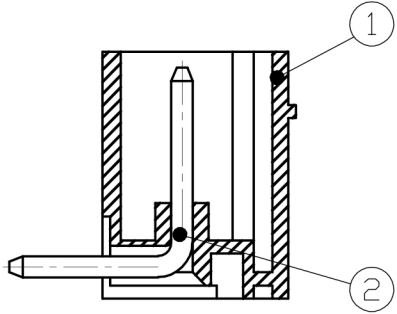
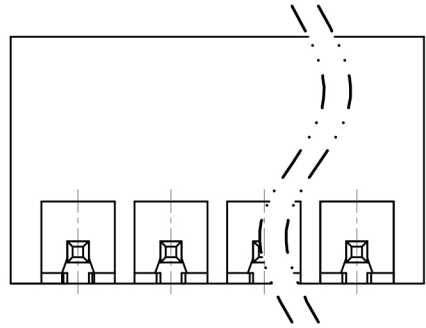
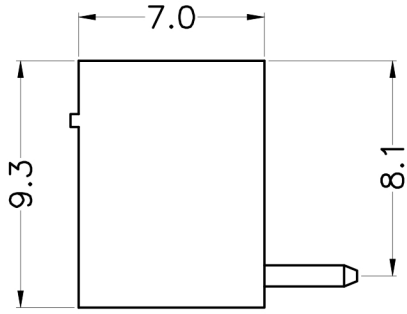


REV.	DESCRIPTION	DATE	DRAWN	APPROVED
A1	DWG.REL	2016/10/7	FANG	YANG

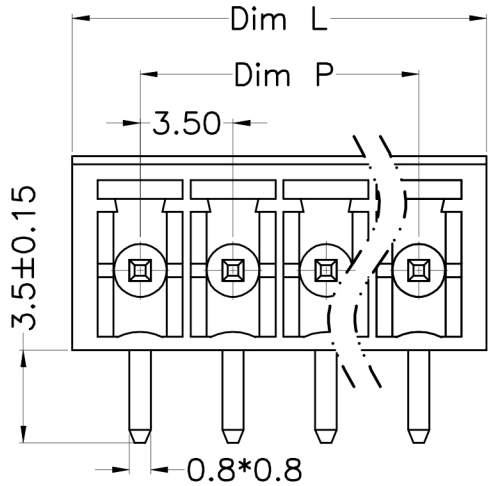

- Material
 - ①Housing : PA66, UL94V-0
 - ②Pin header : Brass, Tin plated
- Electrical

	UL	IEC
Rated voltage :	300V	250V
Rated current :	8A	7A
Insulation resistance:	500MΩ/DC500V	
Withstanding Voltage :	AC1500V/1min	
- Mechanical
 - Operating temperature: -40℃~+105℃
 - Soldering temperature: 250℃±5/5sec


TBPR-00-137-XX-XX-LF

No. of poles: 2~24P

Color:
 G:Green R:Red
 K:Black W:White
 O:Orange B:Blue
 GR:Gray

N=Number of Poles
 Dim P=(N-1)x3.50
 Dim L=Nx3.50+1.6

Poles	Dim	Dim P	Dim L
2-6P		±0.10	±0.15
7-12P		±0.20	±0.20
13-18P		±0.25	±0.30
19-24P		±0.30	±0.40

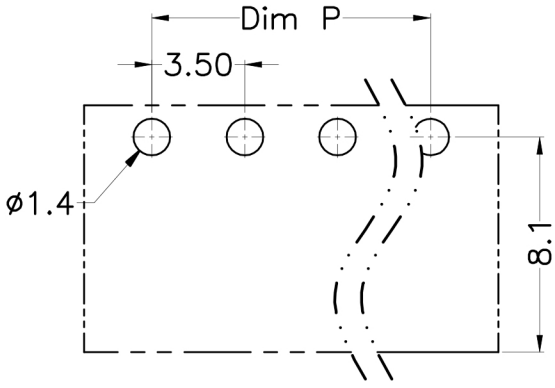

P.C.B.LAYUOT

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.5	X'	±5'
.X	±0.3	.X'	±3'
.XX	±0.1	.XX'	±1'
DRAWING TYPE		CUSTOMER	
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	XP0012016-xxxx		

PROJECTION		TITLE	TBPR-00-137-XX-XX-LF
UNITS	mm	SERIES	TBPR-00-137
SHEET SIZE	A4		

