
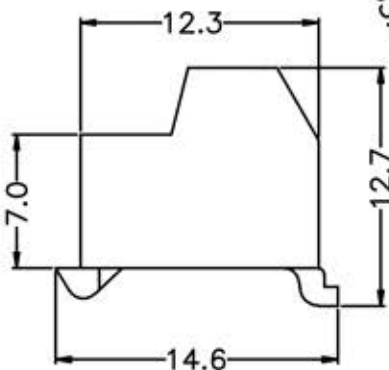
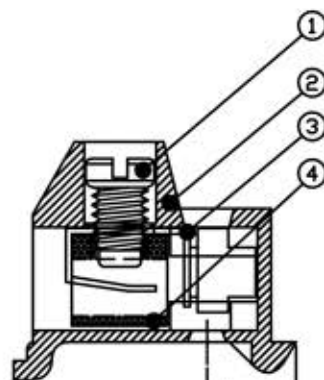
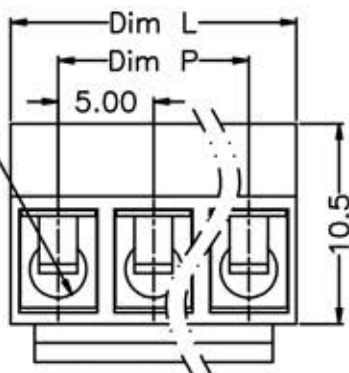


| REV. | DESCRIPTION | DATE | DRAWN | APPROVED |
|------|-------------|-----------|-------|----------|
| A1 | DWG.REL | 2016/10/7 | FANG | YANG |



- Material
 - ØScrews : M3.0 steel, Zinc plated, "-* slot type
 - ØHousing : PA66, UL94V-0
 - ØReed : Phosphor bronze, Ni plated
 - ØPin header : Brass, Tin plated
- Electrical

| | |
|---|------|
| UL | IEC |
| Rated voltage : 300V | 250V |
| Rated current : 10A | 24A |
| Insulation resistance: 500MΩ/DC500V | |
| Withstanding Voltage : AC2000V/1min | |
| Wire range: 28-14AWG 2.5mm ² | |
- Mechanical
 - Operating temperature: -40°C ~ +105°C
 - Soldering temperature: 250°C ±5/5sec
 - Torque: 0.5N.m (4.43Lb.in)
 - Strip length: 5-6mm

4.66 ← HOW TO ORDER

TBW - 12 - 197 - XX - XX - LF

N=Number of Poles
 Dim P=(N-1)x5.00
 Dim L=Nx5.00

| Poles | Dim P | Dim L |
|--------|-------|-------|
| 2-6P | ±0.10 | ±0.15 |
| 7-12P | ±0.20 | ±0.20 |
| 13-18P | ±0.25 | ±0.30 |
| 19-24P | ±0.30 | ±0.40 |

No. of poles: 2~24P

Color:
 G:Green R:Red
 K:Black W:White
 O:Orange B:Blue
 GR:Gray

| GENERAL TOLERANCE | | ANGLE TOLERANCE | | PROJECTION | TITLE |
|-------------------|------|-----------------|-------|------------|---------------------|
| X. | ±0.5 | X' | ±5' | | TBW-12-197-XX-XX-LF |
| .X | ±0.3 | .X' | ±3' | UNITS | mm |
| .XX | ±0.1 | .XX' | ±1' | SHEET SIZE | A4 |
| DRAWING TYPE | | | | CUSTOMER | SERIES |
| SCALE | | 1:1 | SHEET | TBW-12-197 | |
| DRAWING NO. | | XP0012016-xxxx | | | |

ME MAJOR LEAGUE
ELECTRONICS