
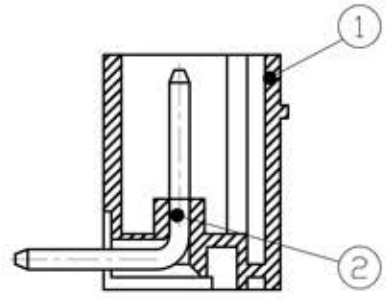
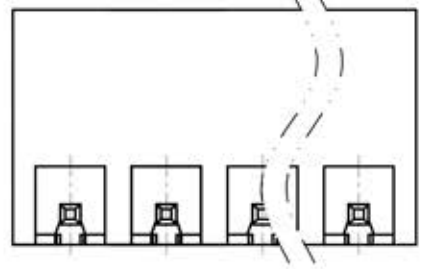
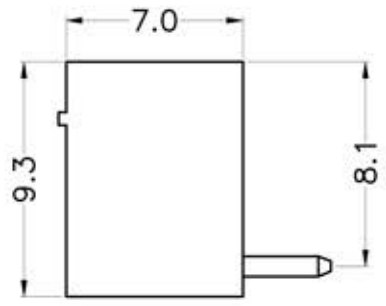


REV.	DESCRIPTION	DATE	DRAWN	APPROVED
A1	DWG.REL	2016/10/7	FANG	YANG

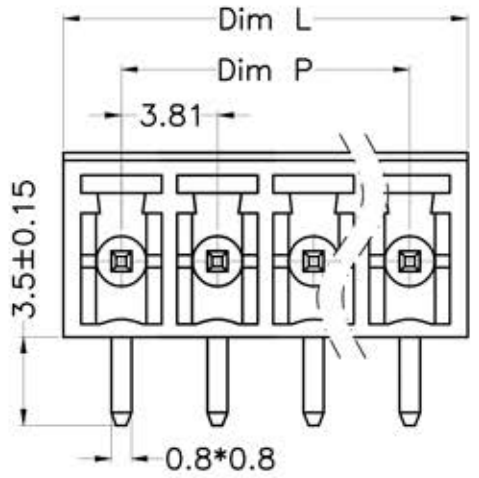

- Material
 ØHousing : PA66, UL94V-0
 ØPin header : Brass, Tin plated
- Electrical

	UL	IEC
Rated voltage :	300V	250V
Rated current :	8A	7A

 Insulation resistance: 500MΩ/DC500V
 Withstanding Voltage : AC1500V/1min
- Mechanical
 Operating temperature: -40°C ~ +105°C
 Soldering temperature: 250°C ±5/5sec

HOW TO ORDER


TBPR - 00 - 150 - XX - XX - LF

No. of poles: 2~24P

Color:
 GR = Green
 BK = Black
 BL = Blue
 WH = White
 GY = Gray
 OR = Orange
 RD = Red

N=Number of Poles
 Dim P=(N-1)x3.81
 Dim L=Nx3.81+0.8

Poles	Dim P	Dim L
2-6P	±0.10	±0.15
7-12P	±0.20	±0.20
13-18P	±0.25	±0.30
19-24P	±0.30	±0.40

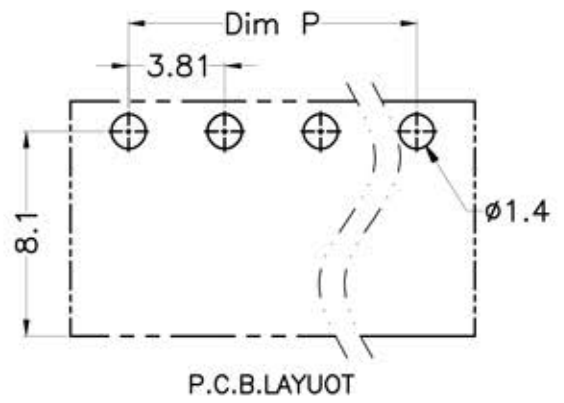

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.5	X'	±5'
.X	±0.3	.X'	±3'
.XX	±0.1	.XX'	±1'

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	XP0012016-xxxx		

PROJECTION		TITLE	TBPR - 00 - 150 - XX - XX - LF
UNITS	mm	SHEET SIZE	A4
SHEET SIZE	A4	SERIES	TBPR-00-150

