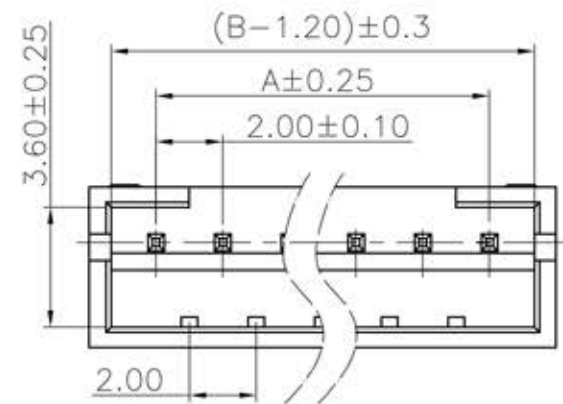
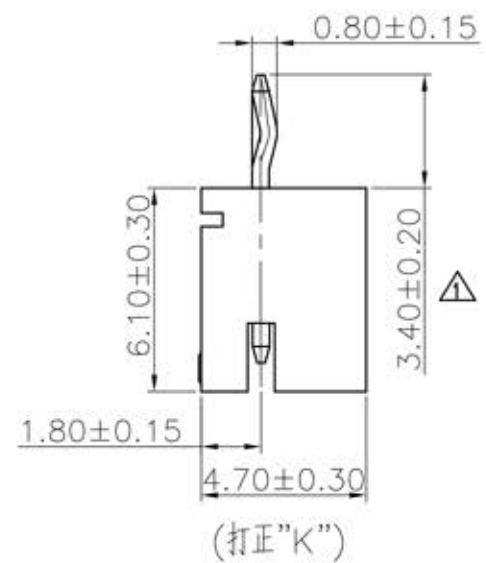
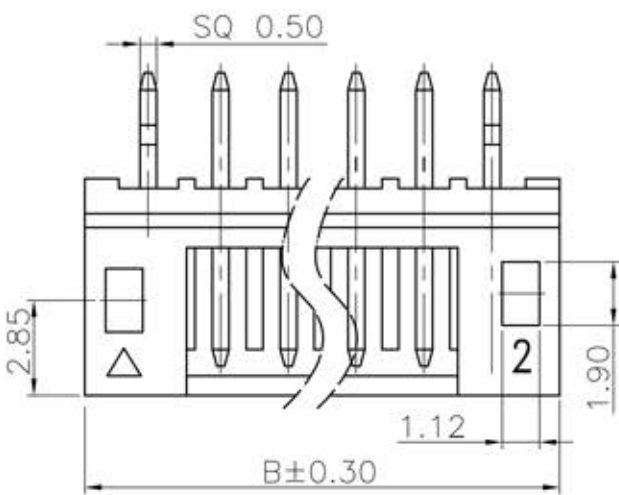


Recommended P.C.B Layout
P.C.B Thickness=1.20mm
(Tolerance=±0.05)

ROHS COMPLIANT

Ordering Information

TFLS - 2XX - 02 - T - LF

No. Pins Per Row
02 - 16

Tin Plating

No. of PIN/ROW	DIM.A	DIM.B
02	2.0	6.0
03	4.0	8.0
04	6.0	10.0
05	8.0	12.0
06	10.0	14.0
07	12.0	16.0
08	14.0	18.0
09	16.0	20.0
10	18.0	22.0
11	20.0	24.0
12	22.0	26.0
13	24.0	28.0
14	26.0	30.0
15	28.0	32.0
16	30.0	34.0

SPECIFICATIONS:

Rated Voltage: 100V AC/DC
Rated Current: 1Amp
Withstand Voltage: 800V AC
Working Temperature: -25°C~+85°C
Insulation resistance: 1000MΩ Min
Contact resistance: 20mΩ Max

MATERIALS:

INSULATOR: NYLON66, UL94V-0
CONDUCTOR: BRASS, Tin-plated

GENERAL TOLERANCE		ANGLE TOLERANCE		DESIGN		DATE	
				Andy		2010.08.12	
X. ±		X'. ±5°		CHECK		DATE	
X ±0.38		X" ±2°					
XX ±0.25		XX' ±1°					
XXX ±0.13		XXX' ±0.5°					
UNIT:mm		SCALE: 1:1		APPRO.		DATE	
A4		SHEET: 1 of 1					
ME MAJOR LEAGUE ELECTRONICS							
FILE NAME (品名)				2.00MM WAFER DIP TYPE			
PART NO (料号)				TFLS-2XX-02-X-LF			
DRAWING NO (图号)				TFLS-2			REV. A1